


HOW TO ORDER CHECK-ALL STYLE 3S (3SC)

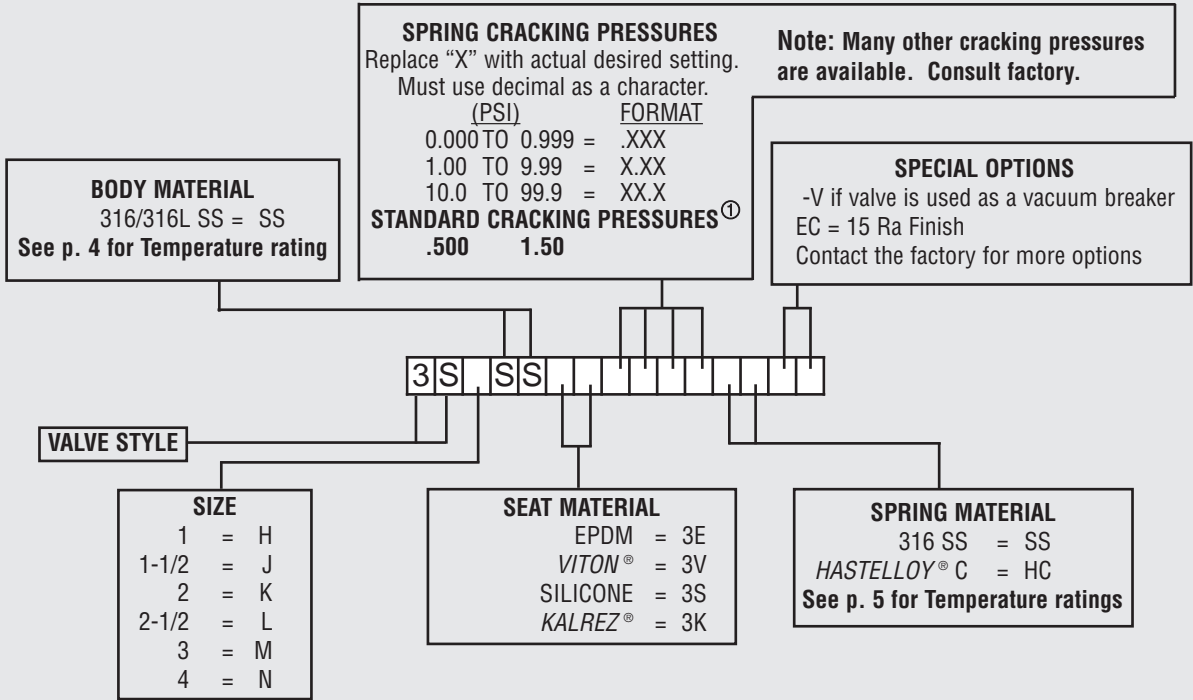

3E - EPDM (-65°F to 300°F)	3K - KALREZ® (0°F to 500°F)
3V - VITON® (-10°F to 400°F)	3S - SILICONE (-80°F to 450°F)
Temperature ranges given are for ideal service conditions and may vary. Consult the factory for assistance with temperature ranges.	

Listed above are the most common material selections. Please contact the factory for additional options.

① Contact factory for non-standard cracking pressure availability. Cracking pressure tolerance is +/- 15%.