


HOW TO ORDER CHECK-ALL STYLE LP (LPI)

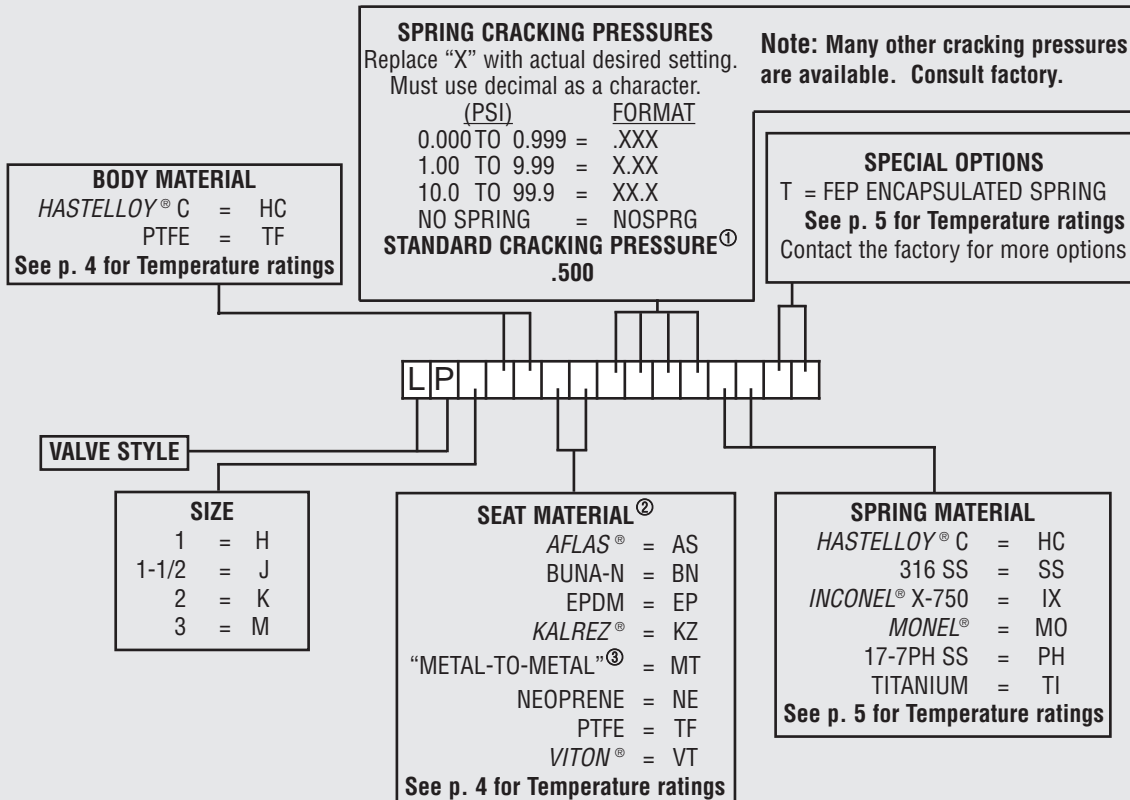

Listed above are the most common material selections. Please contact the factory for additional options.

^① Cracking pressure tolerance is +/- 15%.

^② PTFE seats are not resilient. See page 49 for allowable leakage rates.

^③ For plastic valves, seat is the same as body.